






WINSLOW ADAPTICS

Data Sheet QFN to DIP Generic Adapters


These adapters allow the prototyping of QFN, DFN and UDFN devices on a 2.54mm pitch development board.

The top of the adapter has surface mount pads to which the surface mount device can be soldered.

The underside of the adapter has male DIP pins on 2.54mm pitch. These can either be soldered into a PCB or mated with any standard DIP socket.

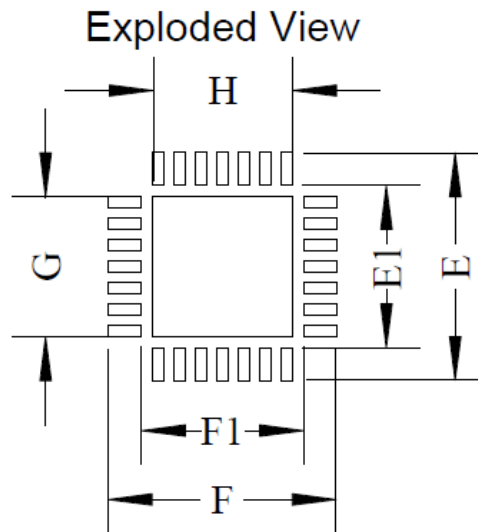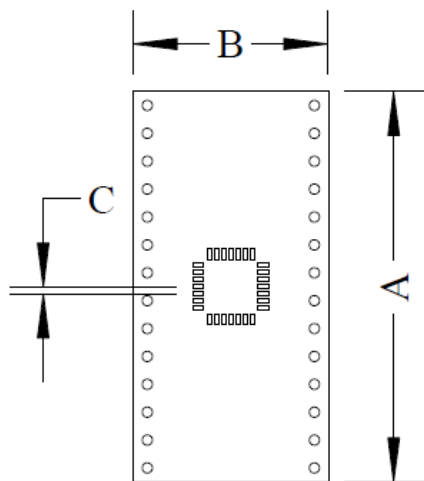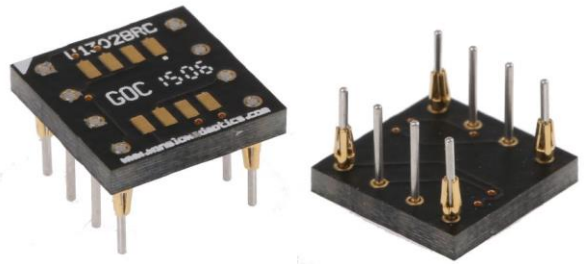

G and H refer to inner pad size.

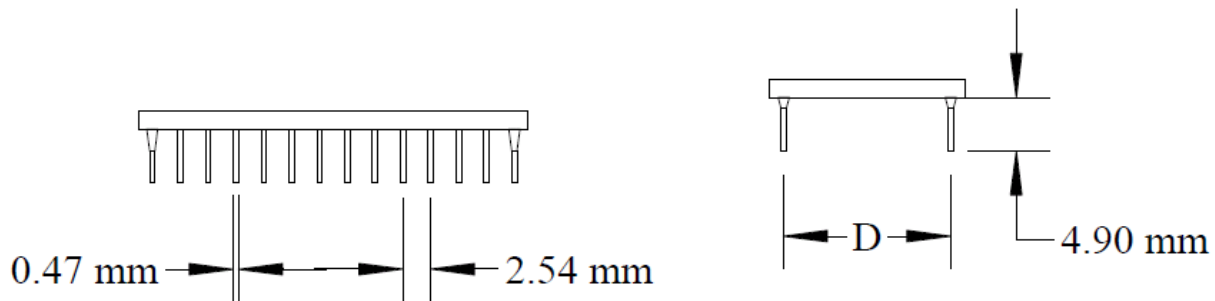

Note: Pad layout and number of pins shown are for illustration only.

All dimensions in mm and may be subject to change without prior notice.

Adapter Dimension Table

Part Number	Body Size (mm)	Number of Pins	A	B	C (lead pitch)	D	E	E1	F	F1	G	H
W13062	3 x 3	4(2x2)	5.08	10.16	0.4mm	7.62	3.75	1.65	3.75	1.65	1.25	1.25
W13041		6(3x2)	7.62	10.16	0.4mm	7.62	1.40	0.20	1.40	0.20	NP*	NP*
W13028		8(4x2)	10.16	10.16	1.27mm	7.62	6.85	3.85	NP*	NP*	NP*	NP*
W13129	3 x 3	8(4x2)	10.16	10.16	0.5mm	7.62	3.40	2.20	NP*	NP*	1.65	2.38
W13082	2 x 2	8	10.16	10.16	0.5mm	7.62	2.80	1.20	2.80	1.20	0.80	0.80
W13088	3 x 3	8	10.16	10.16	0.65mm	7.62	3.80	2.20	3.80	2.20	1.80	1.80
W13024	3 x 3	8(4x2)	10.16	10.16	0.8mm	7.62	4.55	2.65	NP*	NP*	NP*	NP*
W13063	4 x 5	10(3x2)	12.70	10.16	0.8mm	7.62	4.85	2.75	5.85	3.75	2.30	3.30
W13105	3 x 3	10(2x5)	12.70	10.16	0.5mm	7.62	3.15	2.15	NA	NA	1.65	2.38
W13046	4 x 4	12	15.24	10.16	0.8mm	7.62	4.65	2.75	4.65	2.75	2.25	2.25
W13083	3 x 3	12	15.24	10.16	0.5mm	7.62	3.80	2.20	3.80	2.20	1.25	1.25
W13084	3 x 3	12	15.24	10.16	0.65mm	7.62	4.80	3.20	4.80	3.20	2.80	1.80
W13064	2.6 x 2.6	14(4x3)	17.78	10.16	0.5mm	7.62	3.30	1.90	3.30	1.90	1.45	1.45
W13094	4 x 4	14(4x3)	17.78	10.16	0.8mm	7.62	4.85	2.75	4.85	2.75	2.30	2.30
W13102	3 x 3	16	20.32	10.16	0.5mm	7.62	3.75	2.05	3.75	2.05	1.25	1.25
W13089	4 x 4	16	20.32	10.16	0.65mm	7.62	4.80	3.00	4.80	3.00	2.40	2.40
W13095	5 x 5	16	20.32	17.78	0.8mm	15.24	5.75	4.05	5.75	4.05	3.20	3.20
W13065	5 x 4	18(5x4)	22.86	10.16	0.65mm	7.62	4.75	2.65	5.75	3.65	2.25	3.25
W13096	6 x 5	18(5x4)	22.86	10.16	0.8mm	7.62	5.75	3.65	6.75	4.65	3.25	4.25
W13023	4 x 4	20	25.40	10.16	0.5mm	7.62	4.30	2.70	4.30	2.70	NP*	NP*
W13090	5 x 5	20	25.40	10.16	0.65mm	7.62	5.75	3.65	5.75	3.65	3.00	3.00
W13097	6 x 6	20	25.40	17.78	0.8mm	15.24	6.75	4.65	6.75	4.65	4.25	4.25
W13066	6 x 5	22(6x5)	27.94	17.78	0.65mm	15.24	5.85	3.75	6.85	4.75	3.25	4.25
W13052	4 x 4	24	30.48	10.16	0.5mm	7.62	4.60	3.00	4.60	3.00	NP*	NP*
W13039	5 x 4	24(7x5)	30.48	10.16	0.5mm	7.62	4.85	2.75	5.85	3.75	2.25	3.25
W13091	5 x 5	24	30.48	10.16	0.65mm	7.62	5.80	4.00	5.80	4.00	3.25	3.25
W13098	6 x 6	24(7x5)	30.48	17.78	0.8mm	15.24	6.85	4.75	6.85	4.75	4.30	4.30
W13076	4 x 4	28	35.56	10.16	0.4mm	7.62	4.75	3.05	4.75	3.05	2.25	2.25
W13038	6 x 6	28	35.56	17.78	0.65mm	15.24	6.90	4.90	6.90	4.90	NP*	NP*

Note: Pad layout and number of pins shown are for illustration only.

All dimensions in mm and may be subject to change without prior notice.

W13077	5 x 5	28	35.56	15.24	0.5mm	7.62	5.80	3.80	5.80	3.80	3.25	3.25
W13099	7 x 7	28	35.56	17.78	0.8mm	15.24	7.85	5.75	7.85	5.75	5.25	5.25
W13020	5 x 5	32	40.64	10.16	0.5mm	7.62	5.80	4.00	5.80	4.00	3.25	3.25
W13092	7 x 7	32	40.64	17.78	0.65mm	15.24	7.80	5.60	7.80	5.60	4.85	4.85
W13100	8 x 8	32	40.64	17.78	0.8mm	15.24	8.75	6.65	8.75	6.65	6.25	6.25
W13067	6 x 6	36	45.72	17.78	0.5mm	15.24	6.75	4.65	6.75	4.65	4.00	4.00
W13093	8 x 8	36	45.72	17.78	0.65mm	15.24	8.80	7.20	8.80	7.20	6.80	6.80
W13101	9 x 9	36	45.72	17.78	0.8mm	15.24	9.80	7.60	9.80	7.60	NP*	NP*
W13026	5 x 7	38	45.72	10.16	0.5mm	7.62	5.70	4.10	7.70	6.10	NP*	NP*
W13068	5 x 5	40	50.80	10.16	0.4mm	7.62	5.75	4.05	5.75	4.05	3.40	3.40
W13075	6 x 6	40	50.80	17.78	0.5mm	15.24	6.80	4.90	6.80	4.90	4.20	4.20
W13085	8 x 8	40	50.80	17.78	0.65mm	15.24	8.75	6.65	8.75	6.65	6.25	6.25
W13054	7 x 7	44	55.88	17.78	0.5mm	15.24	7.80	5.60	7.80	5.60	4.85	4.85
W13086	9 x 9	44	55.88	17.78	0.65mm	15.24	9.80	8.20	9.80	8.20	NP*	NP*
W13069	6 x 6	48	60.96	17.78	0.4mm	15.24	6.75	4.85	6.75	4.85	4.40	4.40
W13078	7 x 7	48	60.96	17.78	0.5mm	15.24	7.75	6.05	7.75	6.05	5.25	5.25
W13087	9 x 9	48	60.96	17.78	0.65mm	15.24	9.80	8.20	9.80	8.20	7.80	7.80
W13070	8 x 8	52	66.04	17.78	0.5mm	15.24	8.75	6.65	8.75	6.65	6.25	6.25
W13071	7 x 7	56	71.12	17.78	0.4mm	15.24	7.75	5.85	7.75	5.85	5.40	5.40
W13079	8 x 8	56	71.12	17.78	0.5mm	15.24	8.80	7.00	8.80	7.00	6.25	6.25
W13080	9 x 9	60	76.20	17.78	0.5mm	15.24	9.80	8.20	9.80	8.20	7.80	7.80
W13072	9 x 9	64	81.28	17.78	0.5mm	15.24	9.80	8.00	9.80	8.00	7.45	7.45
W13081	10 x 10	68	86.36	17.78	0.5mm	15.24	10.75	8.65	10.75	8.65	7.85	7.85
W13103	10 x 10	72	91.44	17.78	0.5mm	15.24	10.80	9.00	10.80	9.00	8.45	8.45
W13074	12 x 12	80	101.60	17.78	0.5mm	15.24	12.75	10.65	12.75	10.65	10.25	10.25

NP* - No pad



Solutions to Component Leadtime and Obsolescence

Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames. For further information please contact your nearest sales office

sales@winslowadaptics.com

www.winslowadaptics.com