





Data Sheet QFP to PGA with PGA Socket Adapters

These adapters allow the prototyping of QFP and TQFP devices on a 2.54mm pitch development board. The adapters are pre-inserted to a PGA socket and can be easily inserted / extracted.

The top of the adapter has surface mount pads to which the QFP device can be soldered.

The underside of the adapter has male PGA pins on a 2.54mm square matrix and mated with a PGA socket.

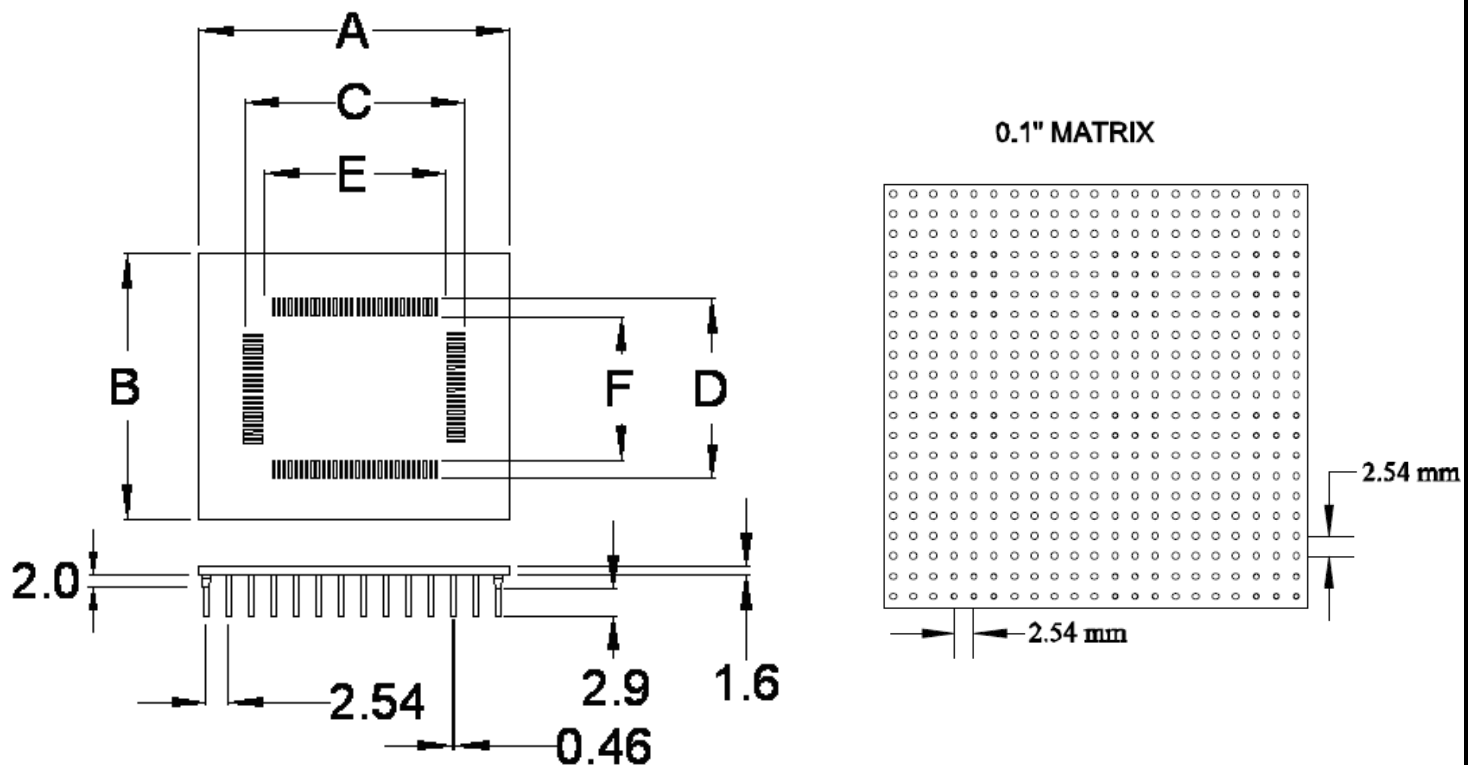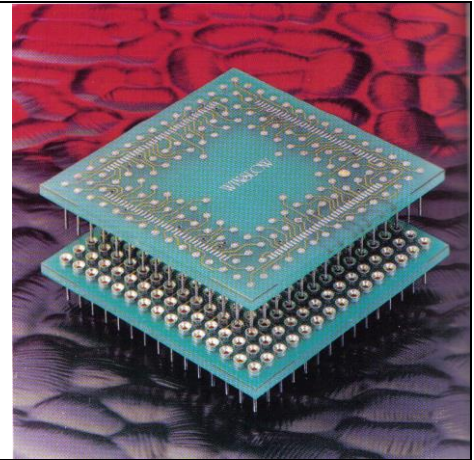

Note: Number of pins shown is for illustration only. All dimensions may be subject to change without prior notice.

PGA Socket shown as full matrix, every adapter type has a individual matrix – please contact sales office for details



Adapter Dimension Table

Part Number	No of Pins	Lead Pitch	'A'	'B'	'C'	'D'	'E'	'F'
WA03280P	32	0.8	25.40	25.40	10.20	10.20	6.10	6.90
WA04480DP	44	0.8	27.90	27.90	14.60	14.60	8.40	10.20
WA04850DP	48	0.5	20.30	20.30	9.52	9.52	5.76	6.98
WA04880P	48	0.8	Consult Factory					
WA05265DP	52	0.65	25.40	25.40	15.45	15.56	10.27	10.27
WA05210DP	52	1.0	27.90	27.90	19.80	20.10	12.50	14.00
WA05665DP	56	0.65	27.90	27.90	15.60	15.60	8.90	10.20
WA05680P	56	0.8	Consult Factory					
WA06080P	60	0.8	27.90	27.90	20.30	20.30	11.50	16.40
WA06450P	64	0.5	25.40	25.40	14.90	14.90	9.00	9.00
WA06465P	64	0.65	25.40	25.40	19.70	19.70	10.10	12.10
WA06480P	64	0.8	30.50	30.50	17.80	17.80	12.70	14.70
WA06825P	68	0.635	Consult Factory					
WA08050P	80	0.5	Consult Factory					
WA08065P	80	0.65	30.48	30.48	17.45	17.45	14.45	14.45
WA08080P	80	0.8	30.50	35.50	19.60	25.60	12.30	22.10
WA10050P	100	0.5	30.50	30.50	1.760	1.760	12.40	15.00
WA10065P	100	0.65	30.50	35.60	19.20	25.60	12.70	22.30
WA10080P	100	0.8	35.60	35.60	25.90	25.90	22.00	22.00
WA11265P	112	0.65	30.50	30.50	22.90	22.90	17.80	21.60
WA12040P	120	0.4	Consult Factory					
WA12050P	120	0.5	43.20	43.20	34.30	34.30	25.4	30.40
WA12080P	120	0.8	43.20	43.20	35.60	35.60	23.80	35.30
WA12850P	128	0.5	35.56	35.56	24.76	18.73	18.73	14.07
WA12880P	128	0.8	Consult Factory					
WA14450P	144	0.5	38.10	38.10	23.92	23.92	17.73	18.20
WA14465P	144	0.65	45.70	45.70	32.30	32.30	22.70	28.40
WA16050P	160	0.5	45.72	45.72	28.78	28.78	19.68	24.23
WA16065P	160	0.65	45.70	45.70	32.30	32.30	26.70	29.10
WA17650P	176	0.5	40.60	40.60	27.50	27.50	21.70	25.10
WA20850P	208	0.5	50.80	50.80	32.80	32.80	26.90	26.90
WA21650P	216	0.5	Consult Factory					
WA23265P	232	0.65	Consult Factory					
WA24050P	240	0.5	45.80	45.80	33.90	33.90	30.50	30.50
WA24065P	240	0.65	Consult Factory					
WA25650P	256	0.5	Consult Factory					
WA30450P	304	0.5	55.88	55.88	44.13	44.13	37.68	41.06

All dimensions in millimetres unless otherwise specified.



WINSLOW ADAPTICS


Insulator:
Polyphenylene Sulphide (PPS)

Insertion Force (Typical):
30g per pin

Contact:
Unique 3 finger design, very low
insertion force

Withdrawal Force (Typical):
20g per pin

Temperature Range:
-55°C to +150°C

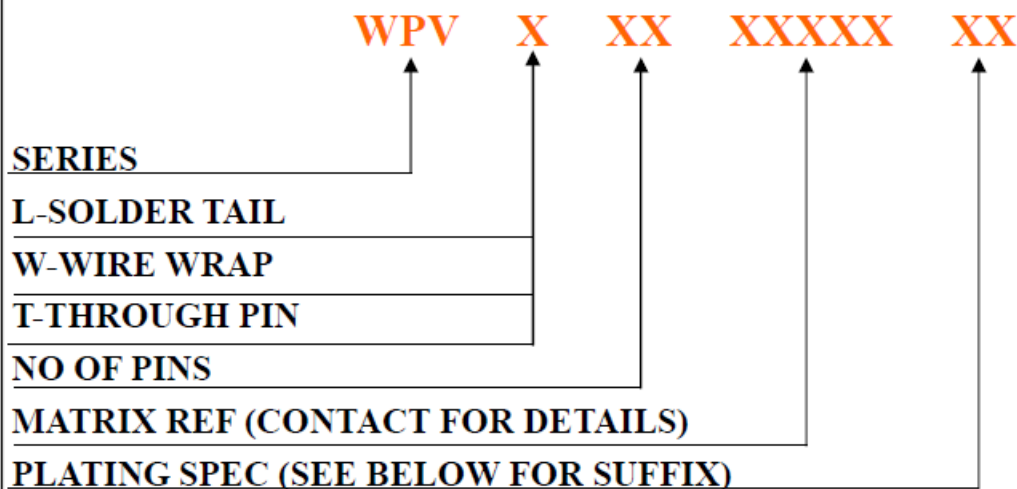

- T - SN / PB SLEEVE / AU FLASH PLATED CLIP
- TRC - PURE SN PLATED SLEEVE / AU FLASH PLATED CLIP
- G - AU FLASH PLATED SLEEVE / AU FLASH PLATED CLIP

Can't see what you want? Call us with your enquiry: 0044 1874 625555



Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames. For further information please contact your nearest sales office

sales@winslowadaptics.com

www.winslowadaptics.com